




Switched Power Distribution Unit VT608t

VT608t / Switched Power Distribution Unit

Monitor 100 sensors, 700 elements,
Reserve power supply

Perfect for device switching
& monitoring in IT racks.

Example connections

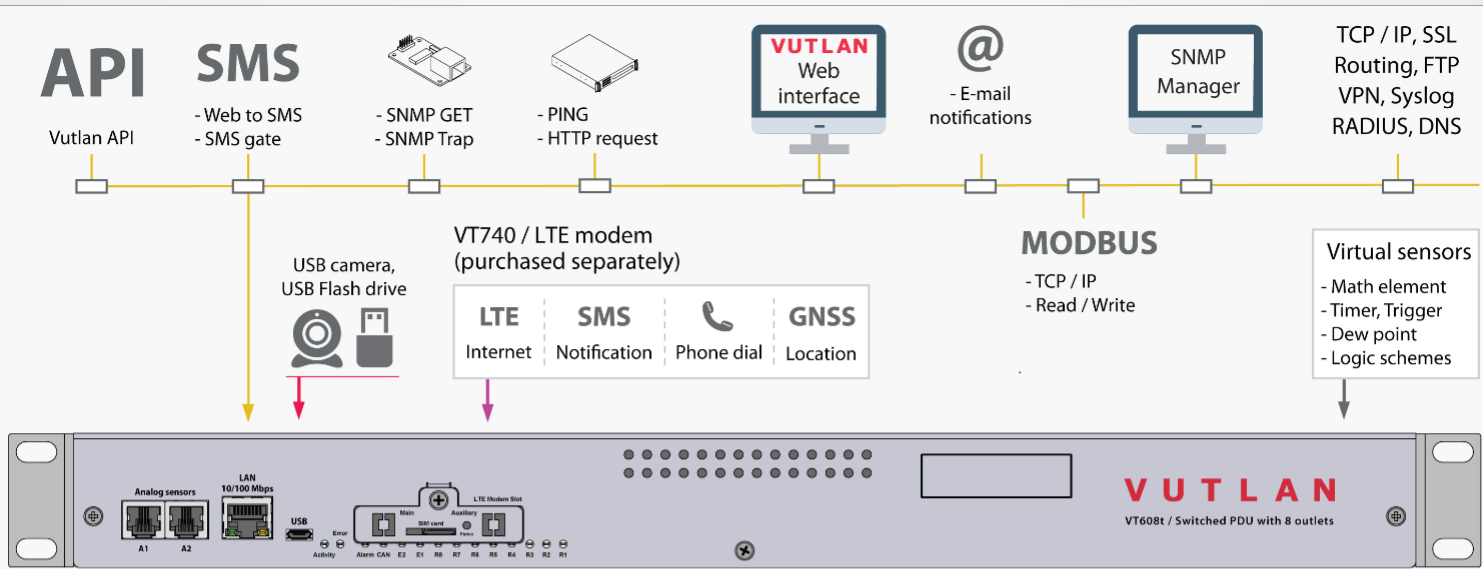


Specifications

CPU Speed / RAM / OS	2 cores, 720mHz / 128Mb / Linux v.6.2
Ethernet	10/100Mbps
Outlets	x8 C13 outlets, 110-240V AC, 50/60 Hz.
Inlet	C20 inlet, 110-240V AC, 50/60Hz, Fuse 16A
Reserve power	12V DC terminal
USB micro	For USB camera, USB flash, USB hub
Analog ports	x2 ports for sensors (extendable using CAN)
CAN port	Connect up to x32 sensors & devices
Dry Contact inputs	x2 dry contact inputs
LAN	Ethernet 10/100 Base-T port
Relays (12V DC)	x2 outputs, 0.25A each
SD card slot	Up to 512 Gb SDHC
LTE slot modem	Ethernet, SMS (VT740 ordered separately)
Mounting	19" 1U (brackets included)
Extension slot	VT485m / Modbus RTU extension slot or VT485r / OSDPv2 reader extension slot
Battery extension slot	VT-ACCU / Rechargeable reservation battery or VT-BAT / Reservation battery 6F22 9V
Warranty	3 years
Support	On-line portal

Supports



- Centralized Monitoring & Control**
 - Responsive Web Interface
 - SNMP v1, v2c, v3
- Scalability**
 - Extension units, LTE modem, OSDPv2, Modbus RTU
 - Modbus TCP/IP, 4-20mA, 0-10V, Analog, CAN
- Improved security**
 - OpenVPN, SSL, HTTPS
 - Three-tier data access permissions with login
- Protocol support**
 - DHCP, HTTP, HTTPS, DynDNS, SMTP, RADIUS, Syslog, NTP server, HTTP request
- API**
 - Application Programming Interface
 - XML, JSON
- System Usability**
 - Multi-language mobile interface
 - First-time wizard
 - Sensor graphing for single and multiple sensors
- Virtual sensors / devices / elements**
 - PING, Timers, Triggers, Logic schemes, SNMP GET
 - IP cameras, Groups, Math
- Notifications and alerts**
 - E-mail, SMS, Phone dial, SNMP Traps, Web-to-SMS, SMS link
- Logging**
 - SD card, USB flash, E-mail, FTP

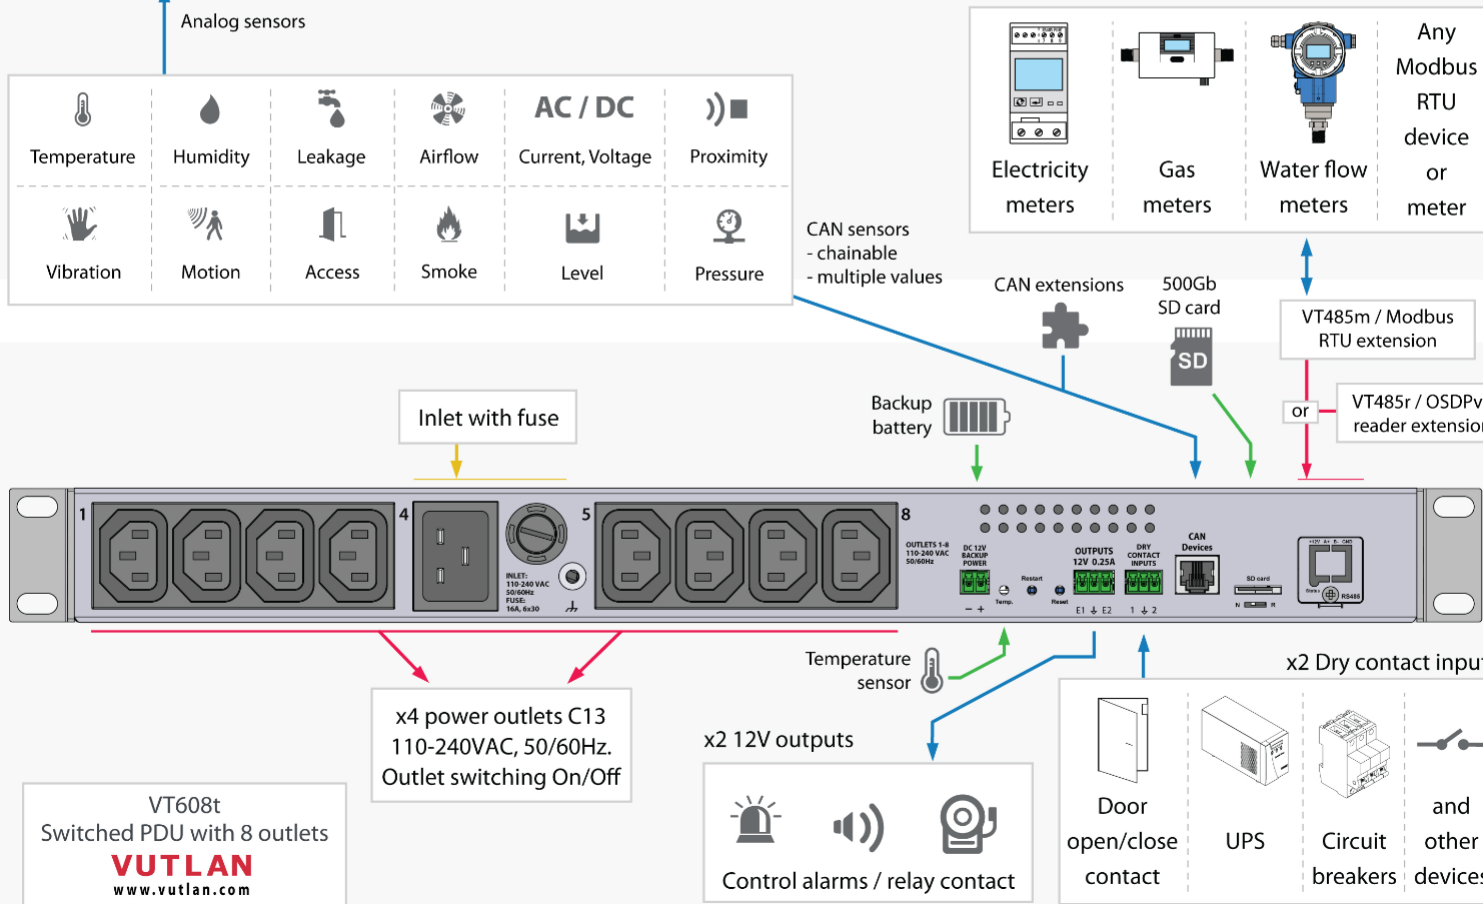


Monitor & Control:

- Outlets**
- Motion**
- SNMP**
 - Trap, Get
- Smoke**
- Modbus**
 - TCP/IP, RTU
- Relays**
- Temperature**
- Leakage**
- Vibration**
- Contacts**
- Access**
- Airflow**
- Proximity**
- Pressure**
- Level**
- PING**
- AC / DC**
 - Power
- 4-20mA**
- Alarms**
- Humidity**

Embedded Web Interface

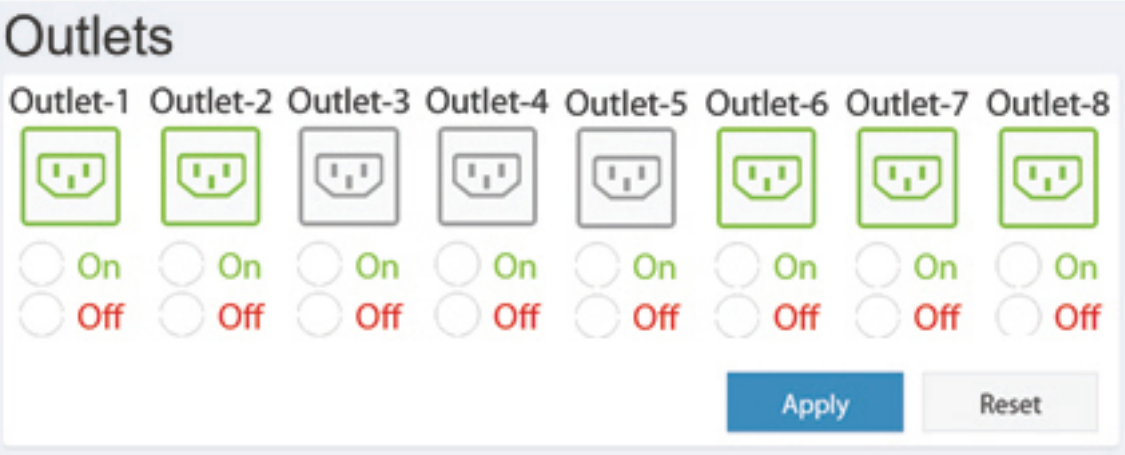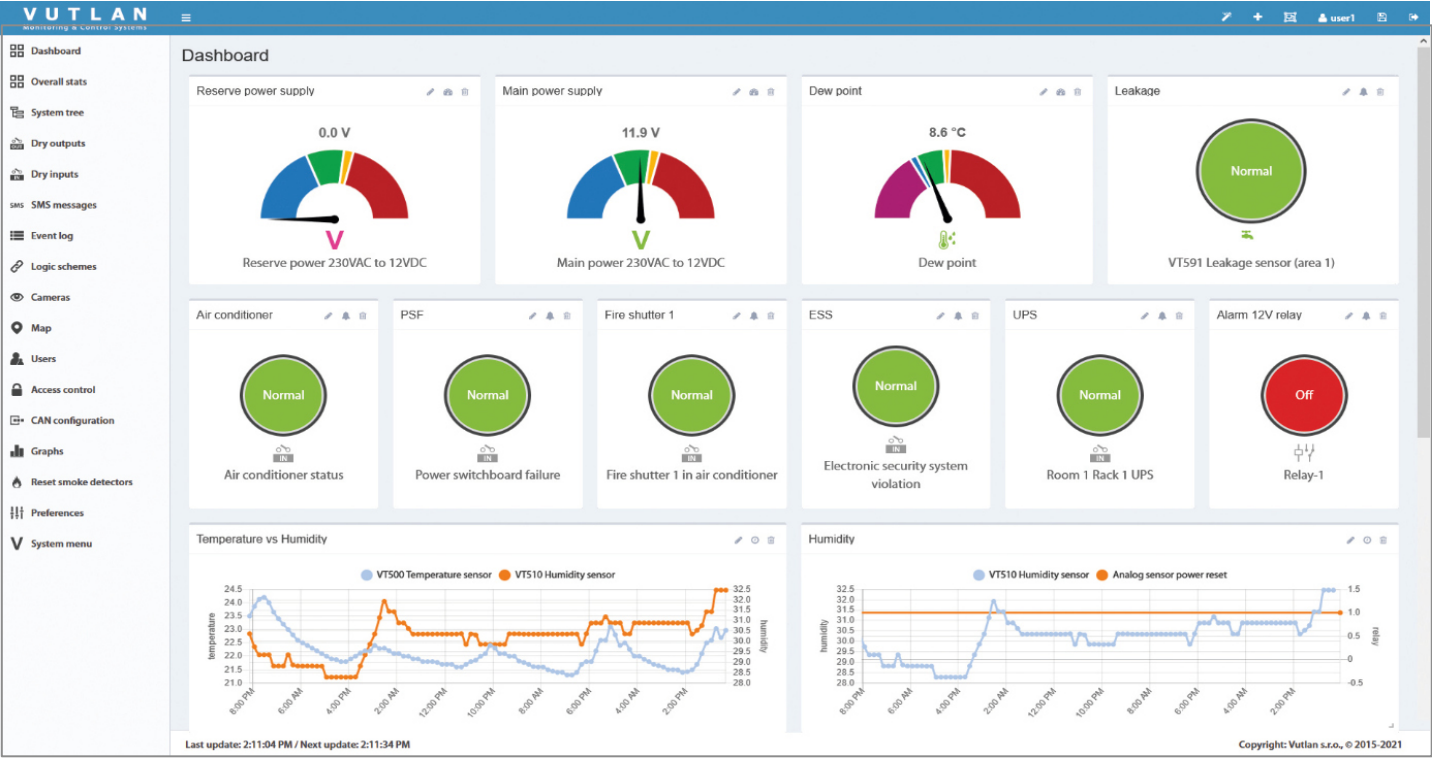



Dimensions

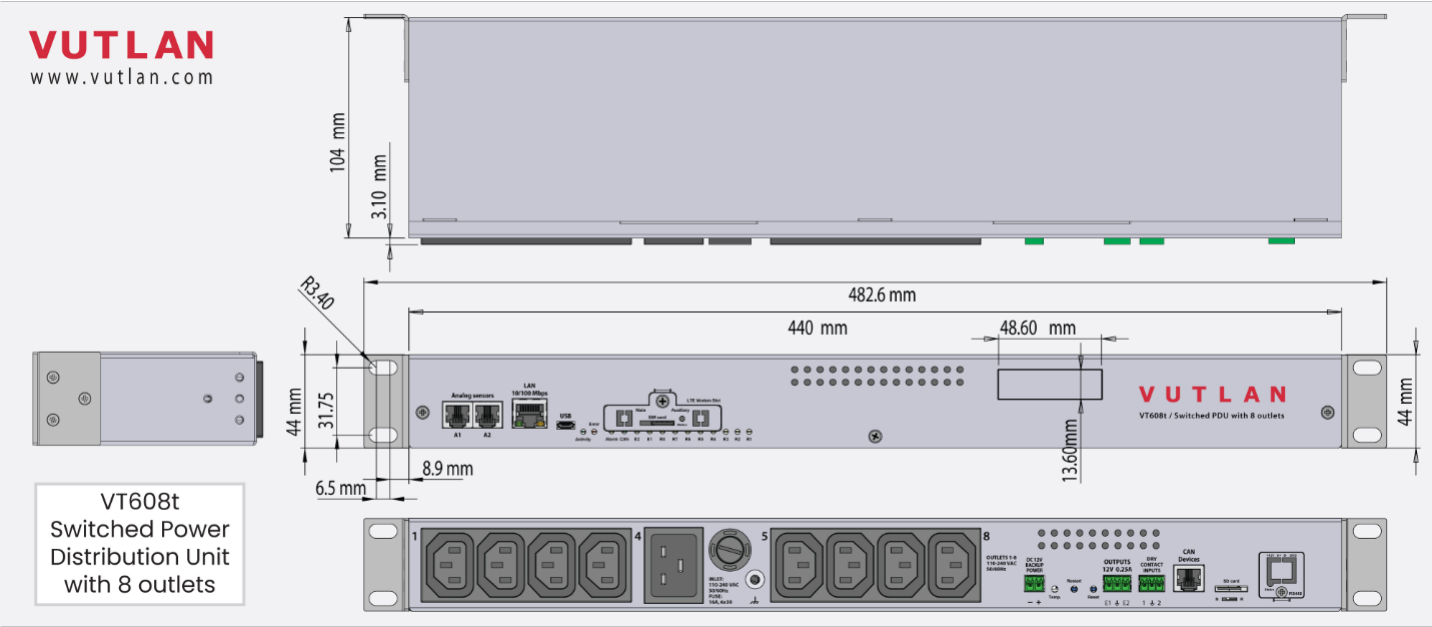

VT485m / Modbus RTU extension or VT485r / OSDPV2 reader extension


Ordered separately

Ordered separately

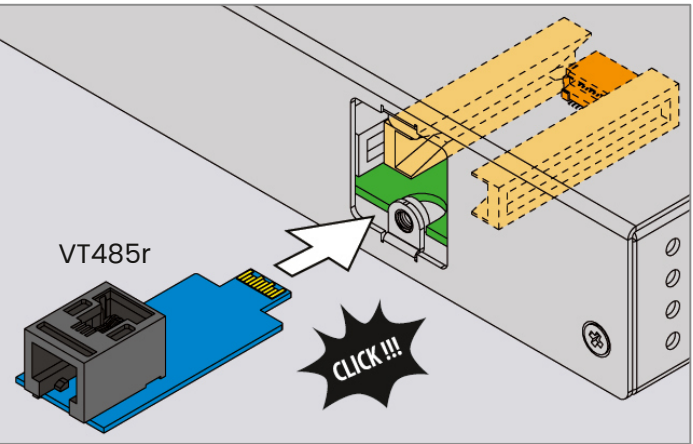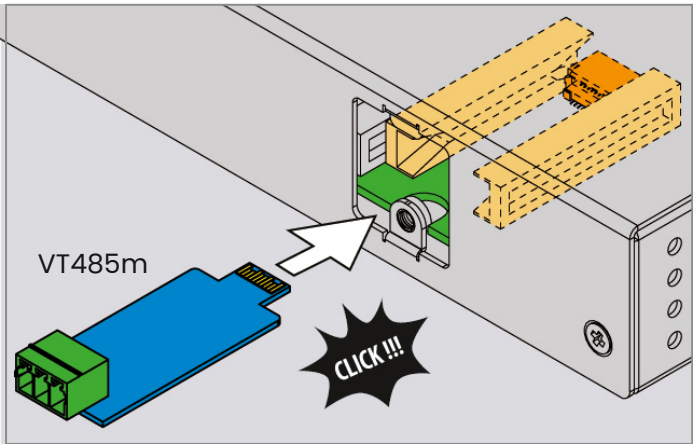

VT740 / LTE slot modem


Ordered separately

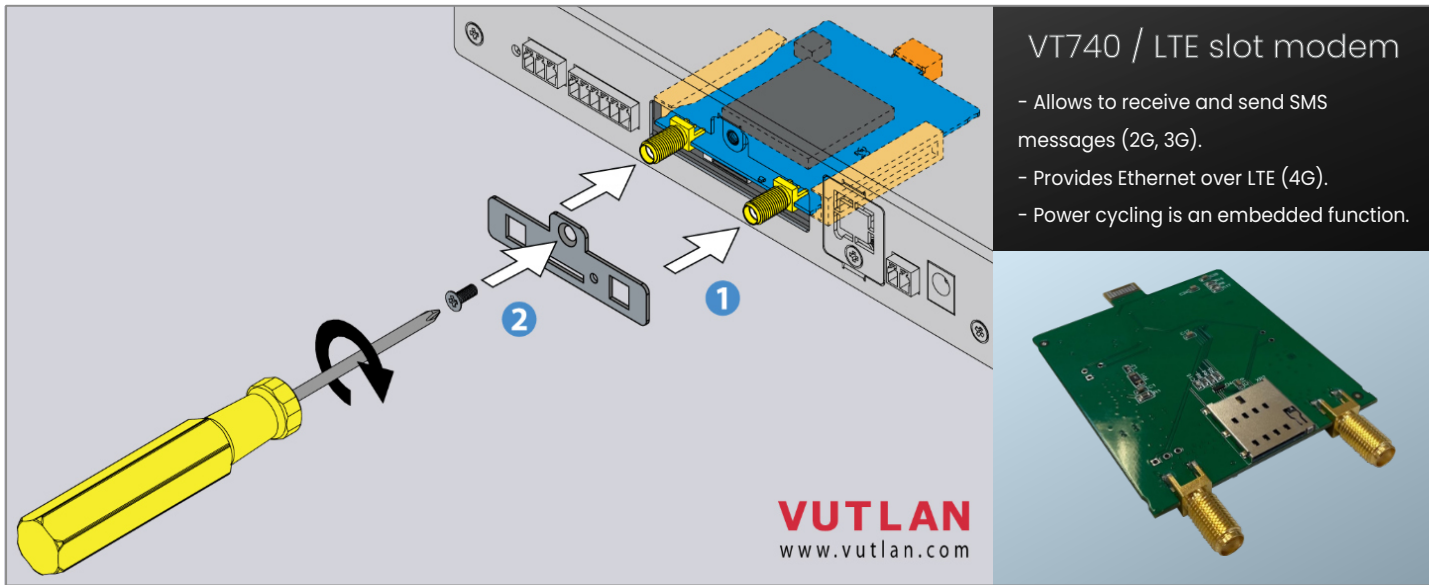


VT-BAT / Backup battery 6F22 9V or VT-ACCU / Backup reservation battery

Ordered separately


Ordered separately

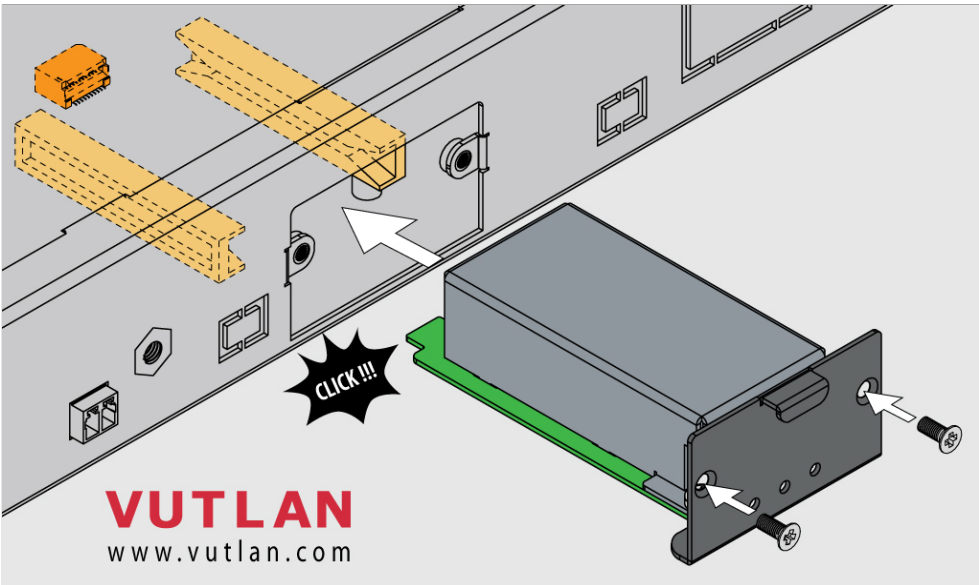

Leakage detection

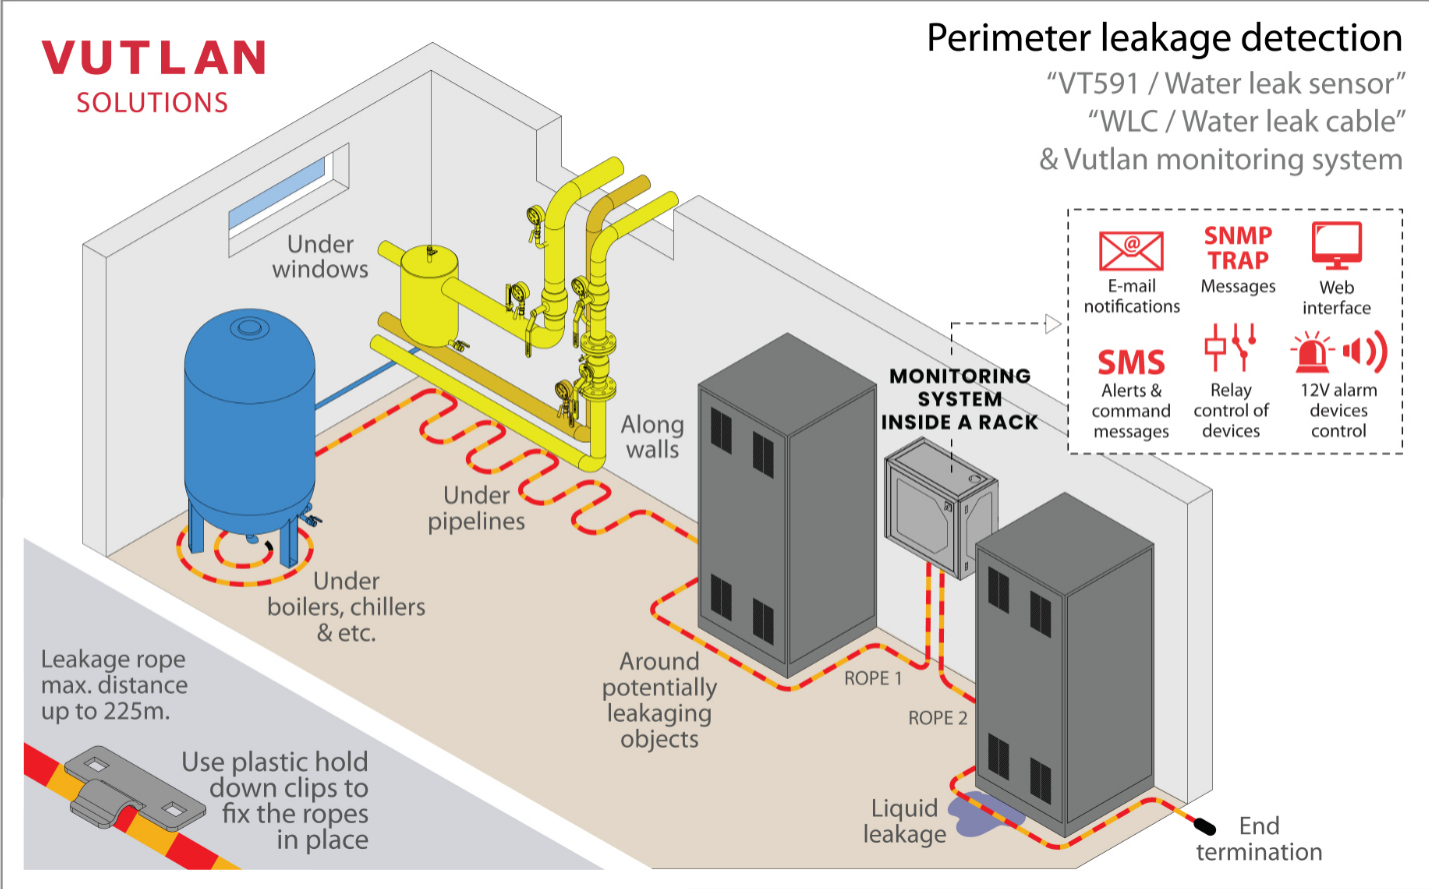


Measure AC voltage 0-246V

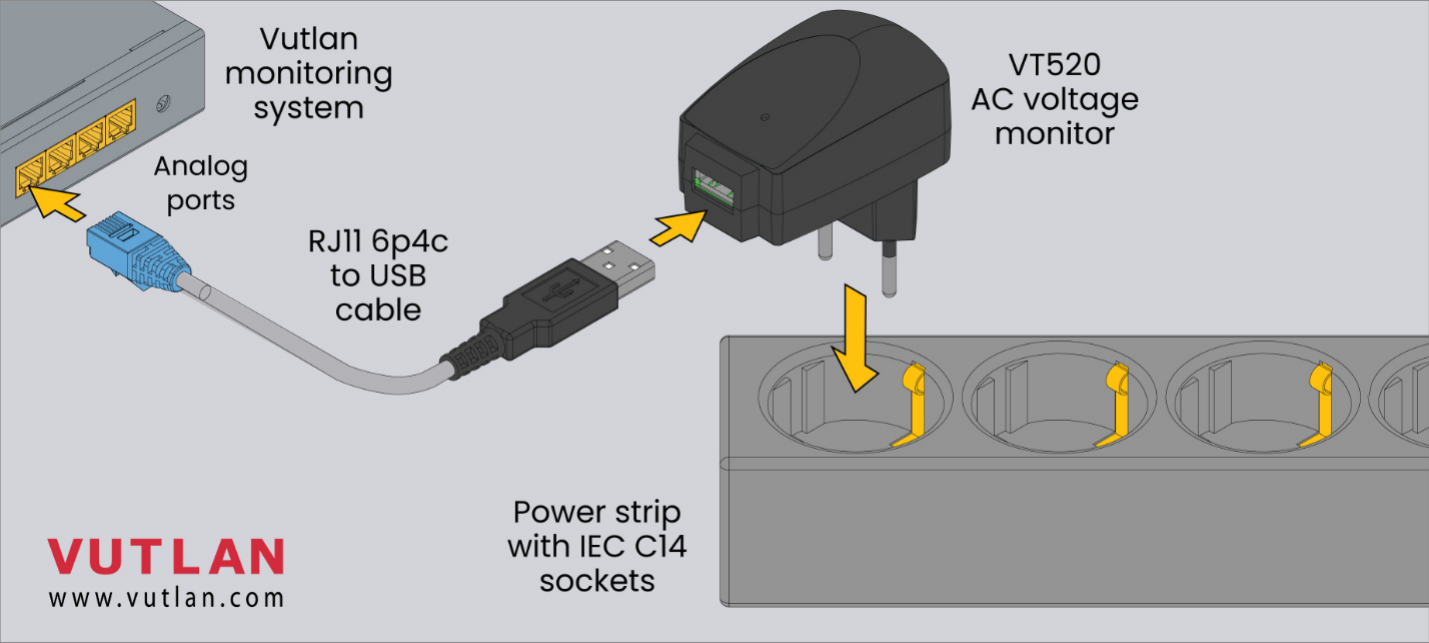


VT485m / Modbus RTU extension

Ordered separately

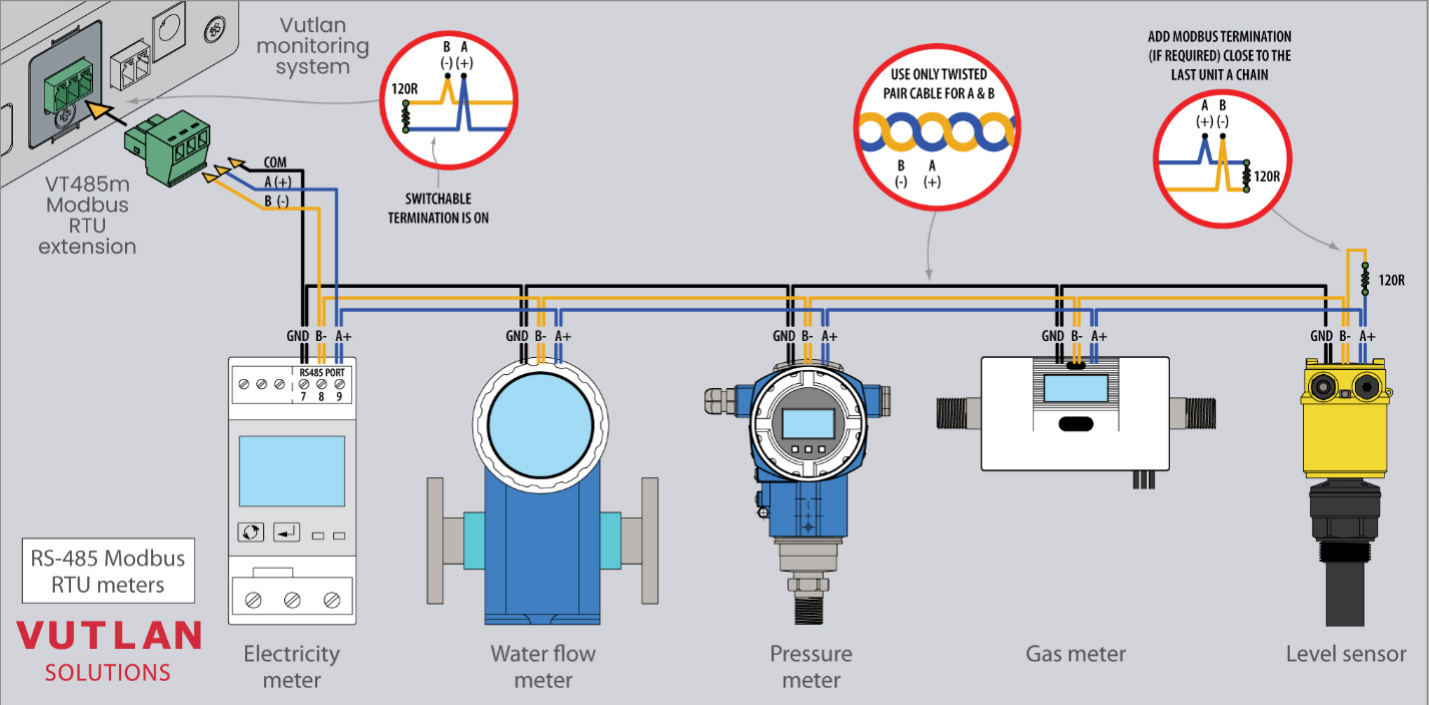

Server Rack & Data Center monitoring

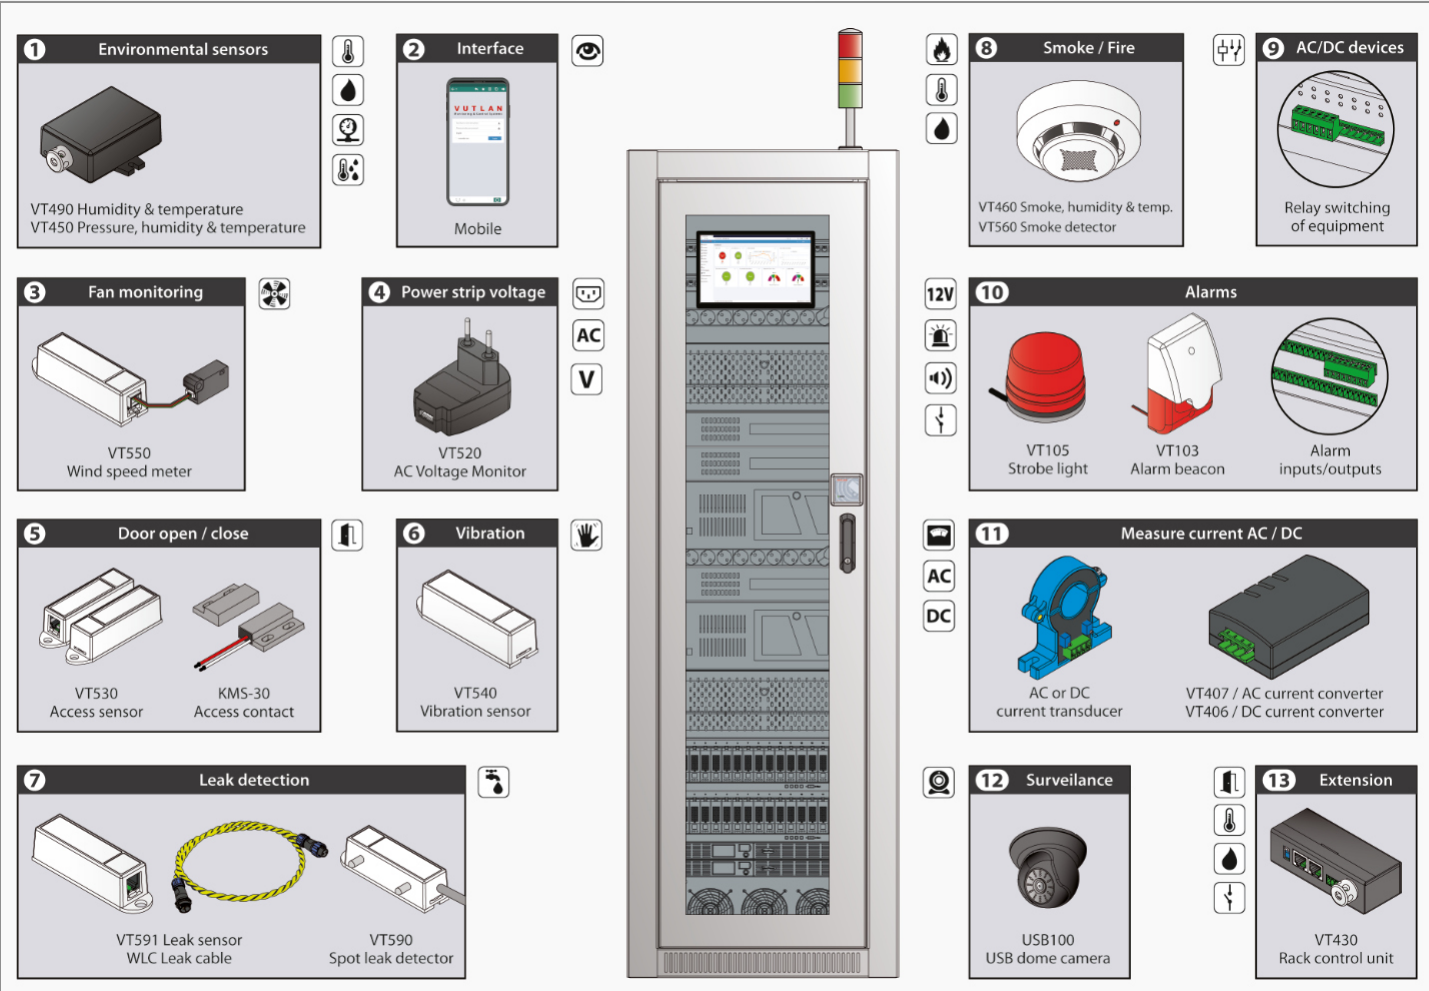




Vutlan

Partner Network

Vutlan is working with Distributors,
Solution Providers and Integrators
all around the world.

65+
PARTNERS

+37
COUNTRIES



Vutlan s.r.o. (LTD)
43 ul.Svornosti,
82106, Bratislava,
Slovak Republic, EU
sales@vutlan.com
www.vutlan.com

VUTLAN