




Remote Monitoring unit VT825t

VT825t / Remote Monitoring Unit

Monitor 130 sensors, 1000 elements,
Redundant Power & Network

Perfect for monitoring
IT rooms & BTS sites

Example connection

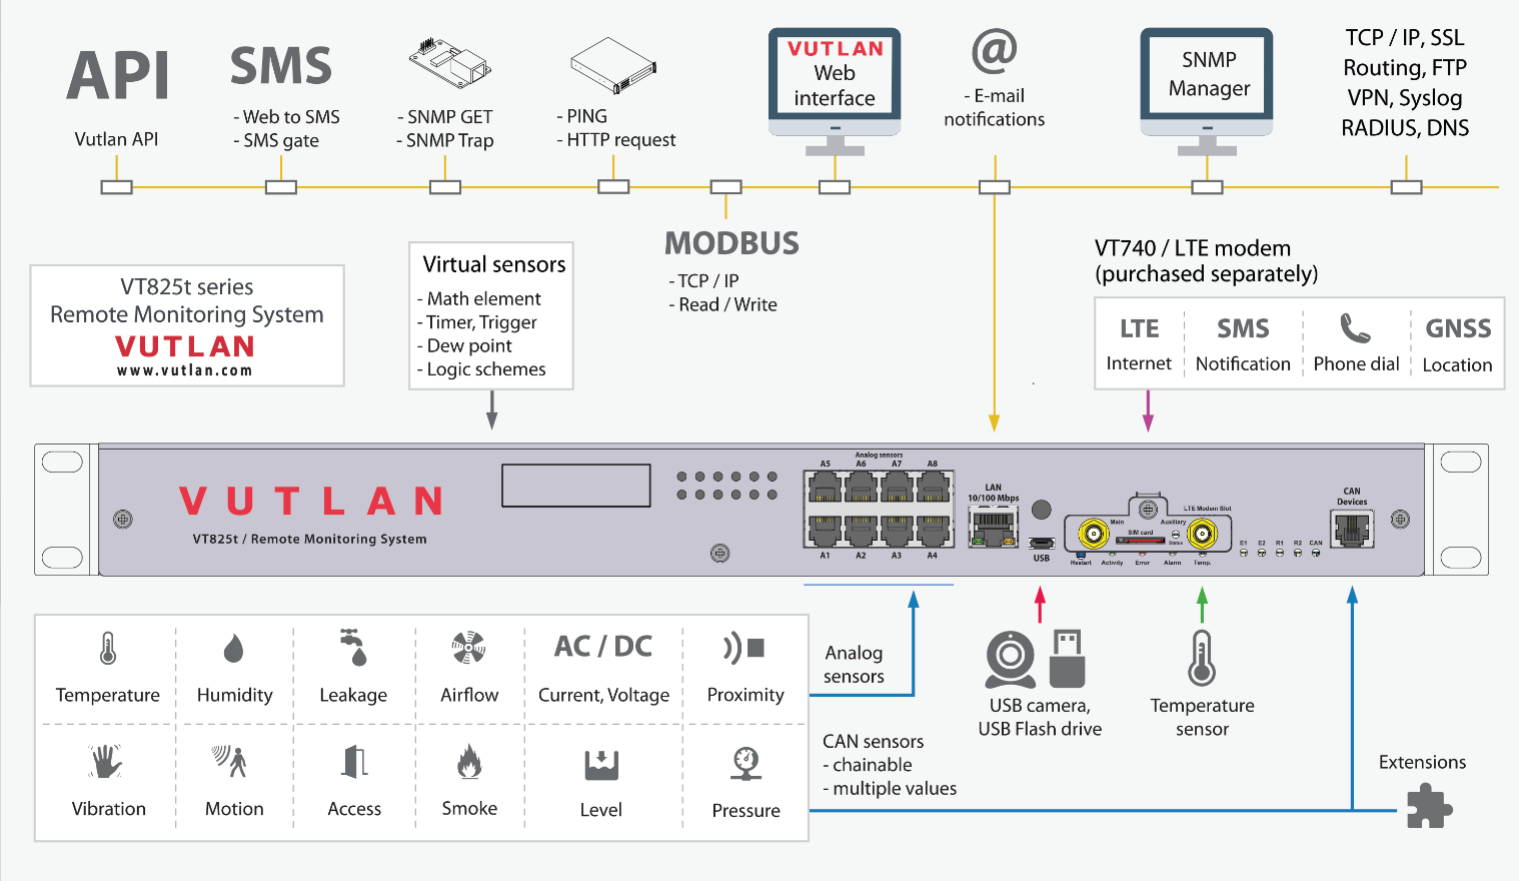


Specifications


CPU Speed / RAM / OS	2 cores, 720mHz / 128Mb / Linux v.6.2
Ethernet	10/100Mbps
Redundant power	x1 100-240V AC 50/60Hz inputs, x1 12V DC Other order options exist (e.g. 24-48V DC)
USB port	For USB camera, USB flash, USB hub
Analog ports	x8 ports for sensors (extendable)
CAN port	x1 port (max. 32 sensors & extensions)
Dry Contact inputs	x16 dry contact inputs
Relays (12V DC)	x2 outputs, 0.25A each
Relays (NC/NO/COM)	x2 bistable power relays terminals
SD card slot	Up to 512 Gb SDHC
LTE slot modem	Ethernet, SMS, GPS (VT740 ordered separately)
Mounting	19" 1U (brackets included)
Extensions	VT485m / Modbus RTU extension slot or VT485r / OSDPv2 reader extension slot
Warranty	3 years
Support	On-line portal

Supports

	Centralized Monitoring & Control - Responsive Web Interface - SNMP v1, v2c, v3
	Scalability - Extension units, LTE modem, OSDPv2, Modbus RTU - Modbus TCP/IP, 4-20mA, 0-10V, Analog, CAN
	Improved security - OpenVPN, SSL, HTTPS - Three-tier data access permissions with login
	Protocol support DHCP, HTTP, HTTPS, DynDNS, SMTP, RADIUS, Syslog, NTP server, HTTP request
	API - Application Programming Interface - XML, JSON
	System Usability - Multi-language mobile interface - First-time wizard - Sensor graphing for single and multiple sensors
	Virtual sensors / devices / elements - PING, Timers, Triggers, Logic schemes, SNMP GET - IP cameras, Groups, Math
	Notifications and alerts E-mail, SMS, Phone dial, SNMP Traps, Web-to-SMS, SMS link
	Logging SD card, USB flash, E-mail, FTP

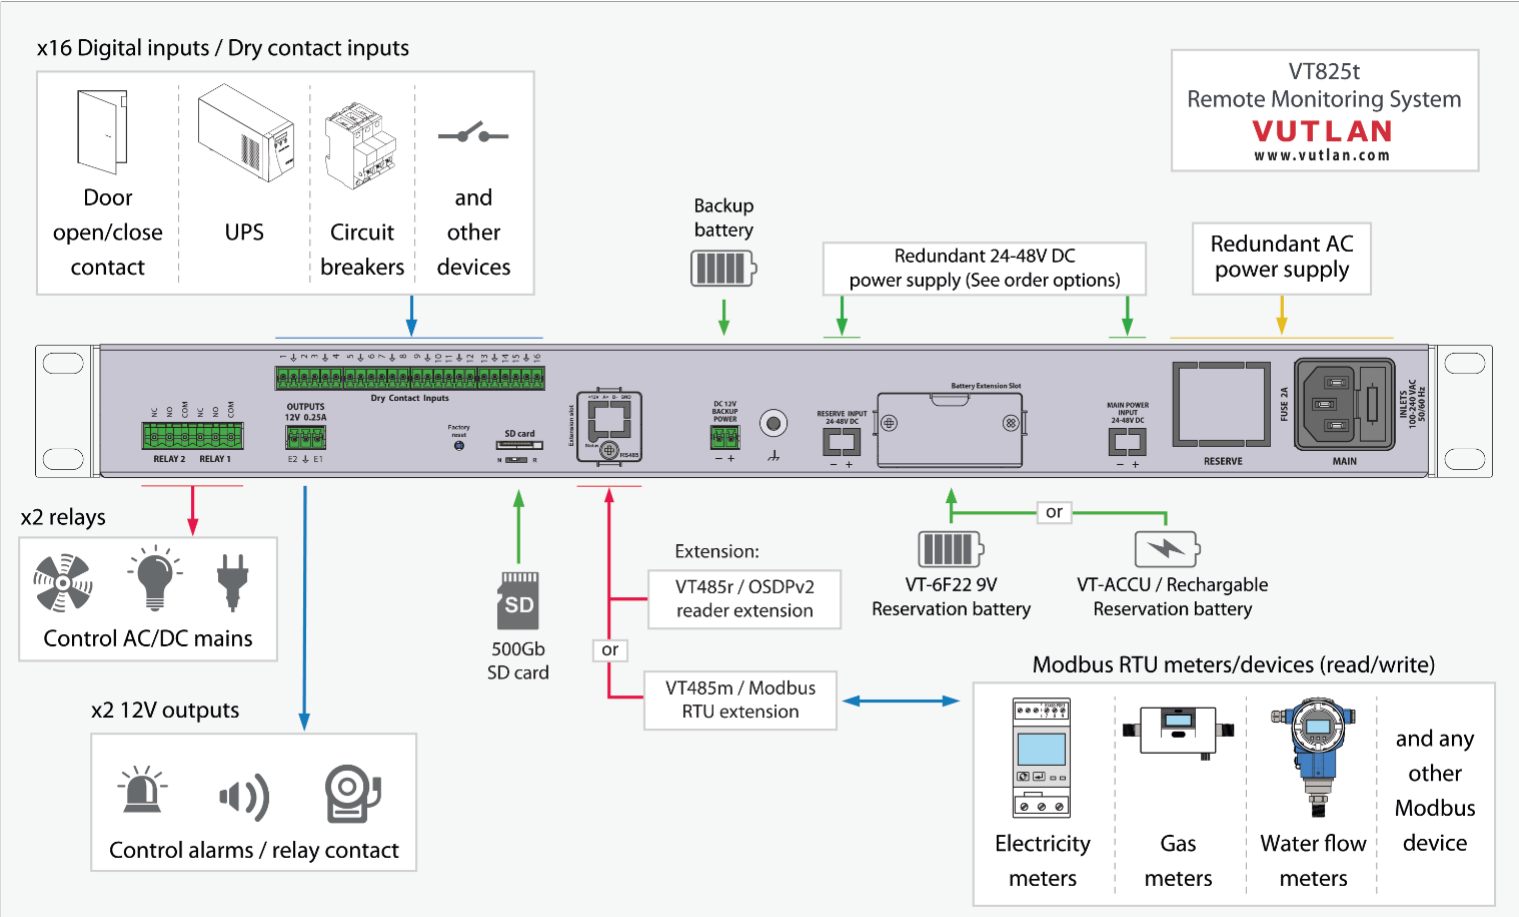


Embedded Web Interface

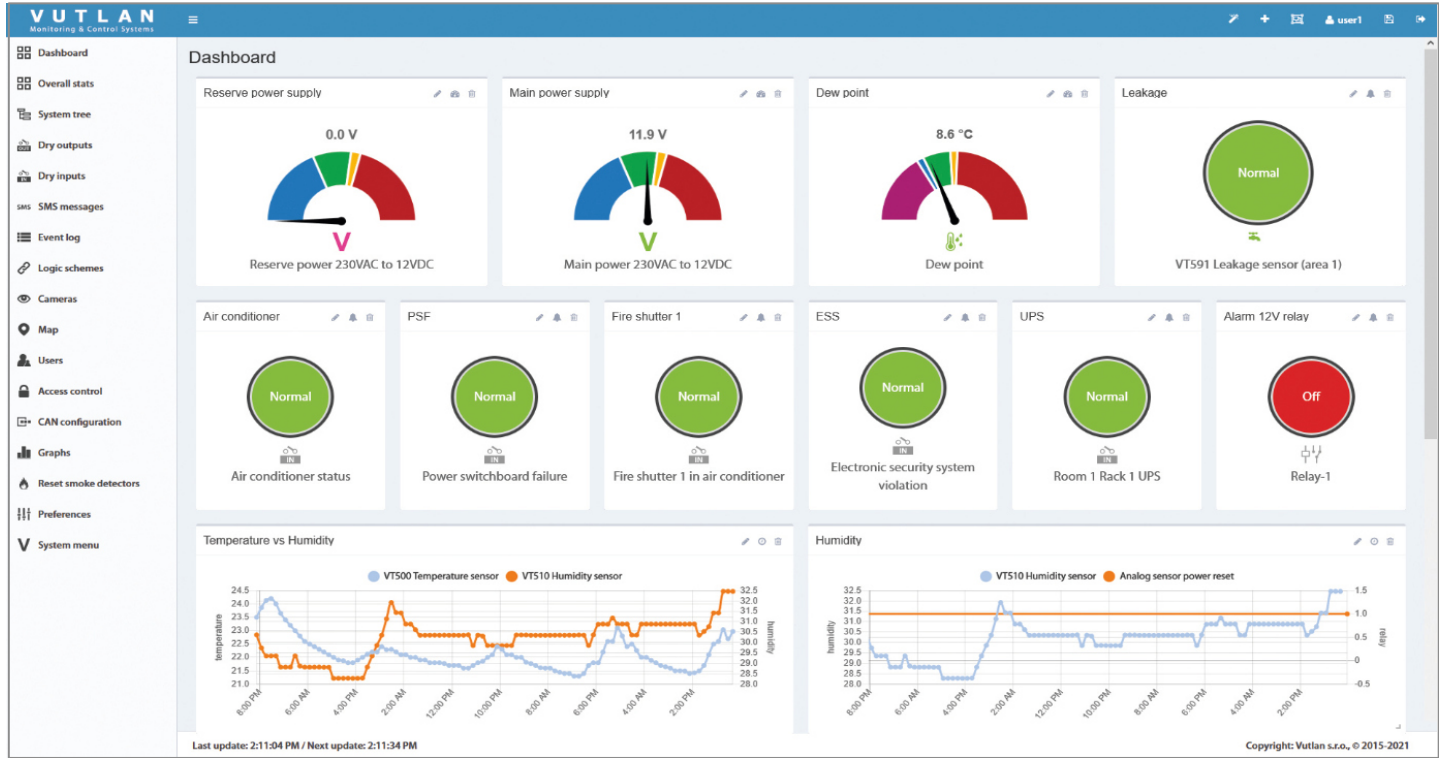

Monitor & Control:

Humidity	Motion	SNMP Trap, Get	Smoke	Modbus TCP/IP, RTU	Relays	Temperature	Leakage	Vibration	Contacts
Access	Airflow	Proximity	Pressure	Level	PING	AC / DC Power	4-20mA	Alarms	



VT825tt dimensions

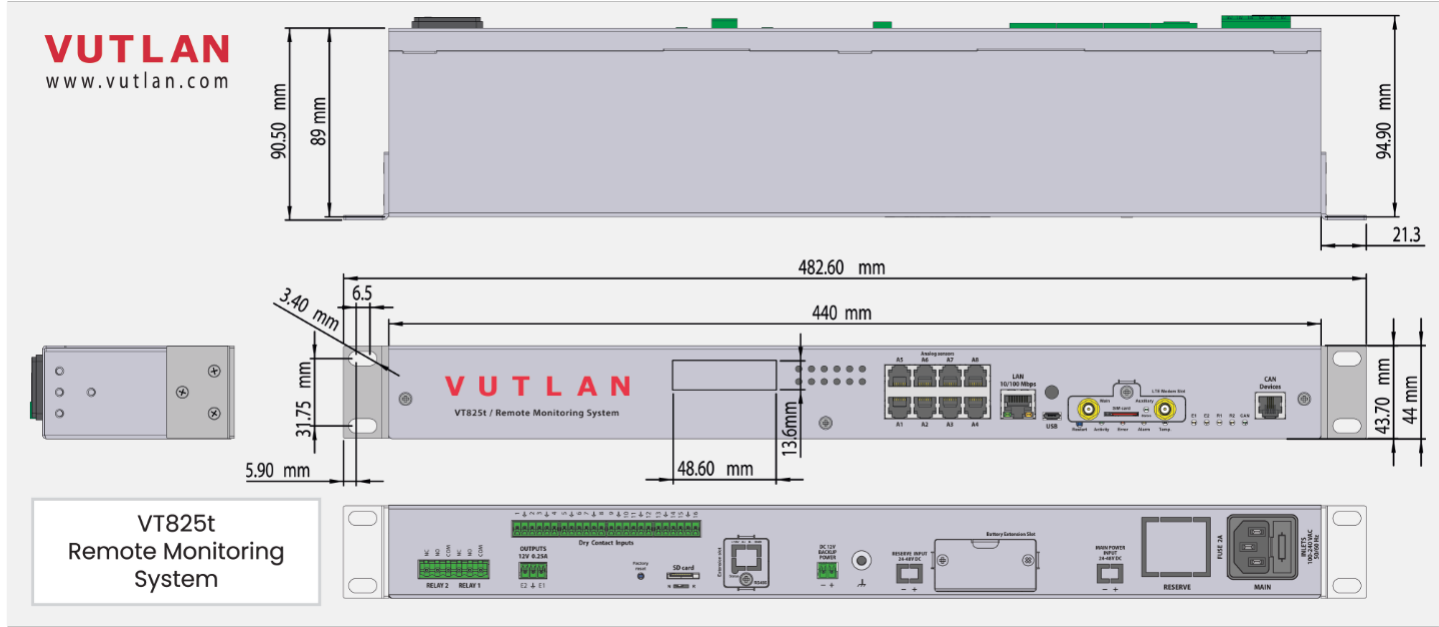

VT485m / Modbus RTU extension or VT485r / OSDPV2 reader extension


Ordered separately

Ordered separately

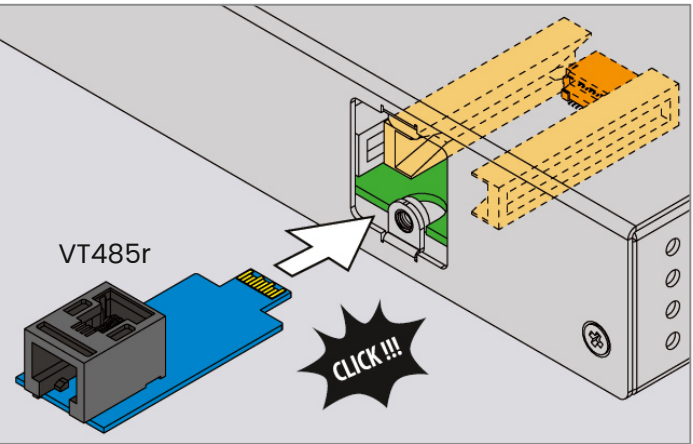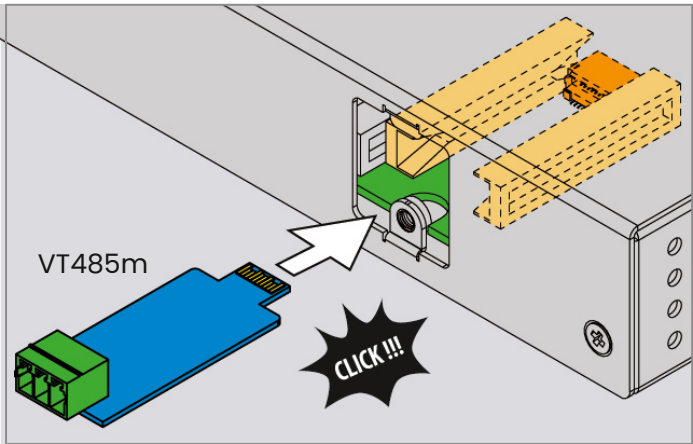


VT740 / LTE slot modem

Ordered separately

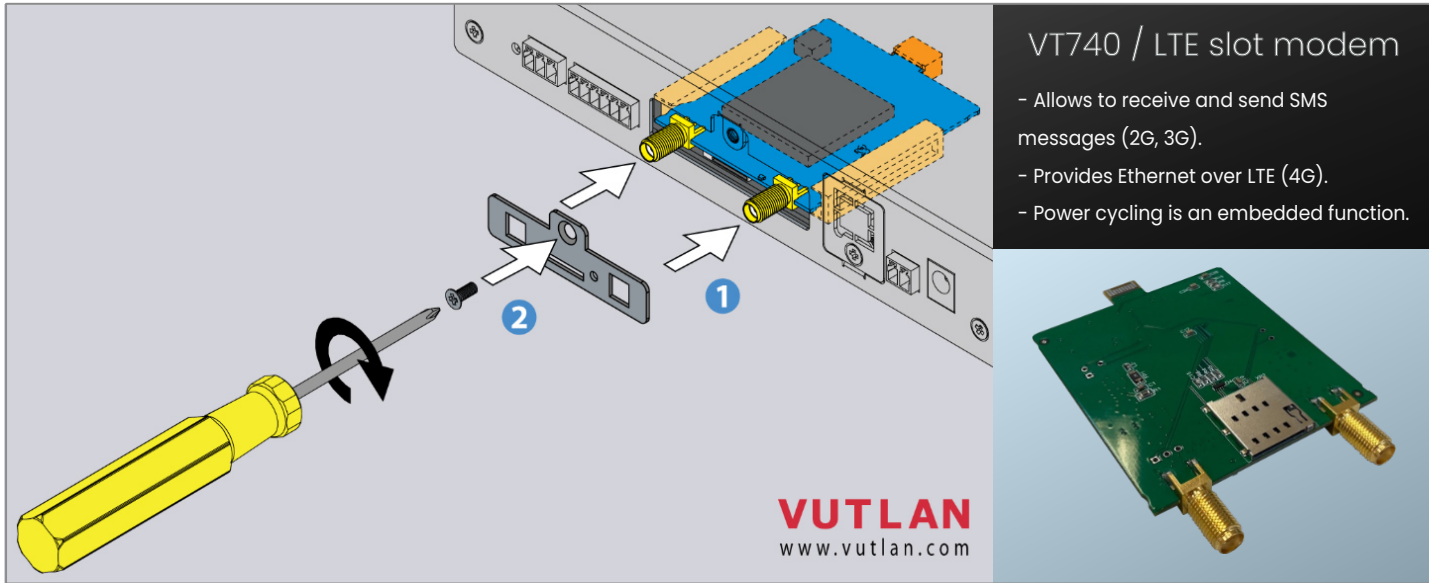


19inch 1U installation


Brackets included

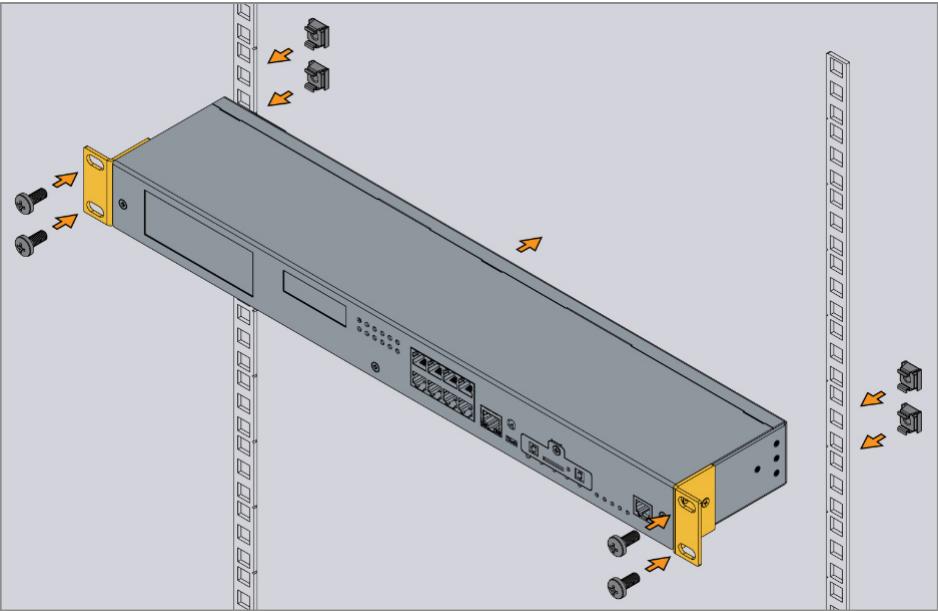

Leakage detection

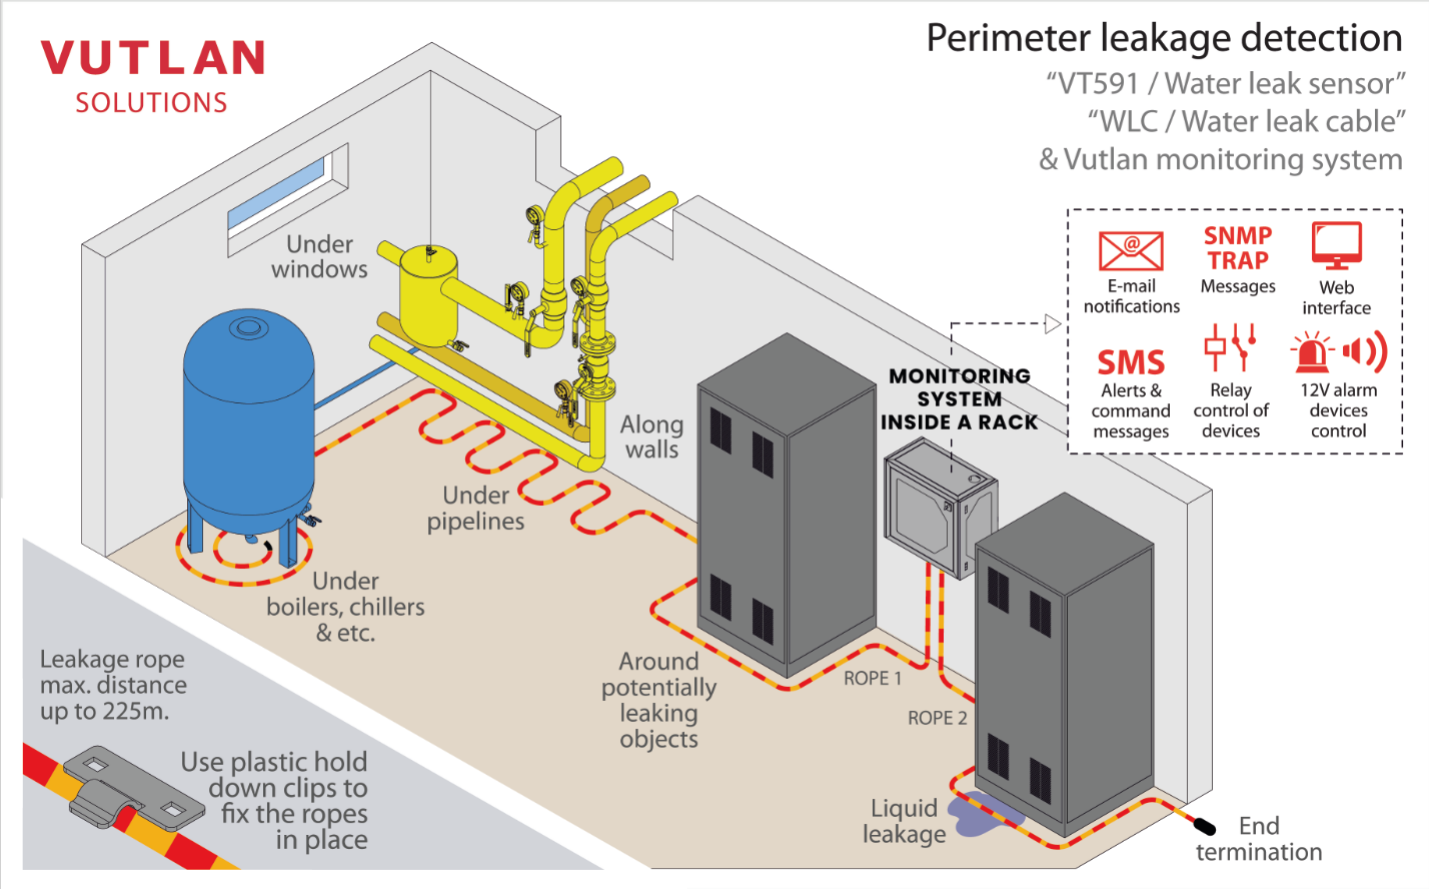


Measure AC voltage 0-246V

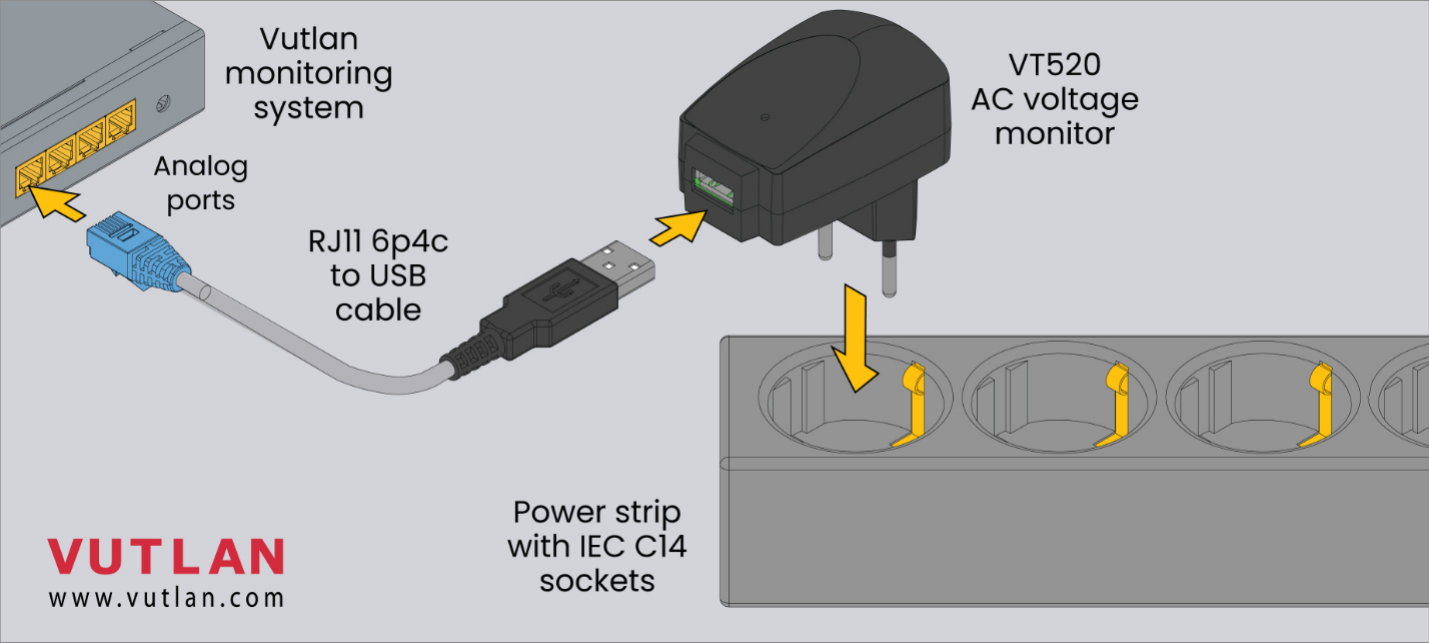



VT485m / Modbus RTU extension

Ordered separately

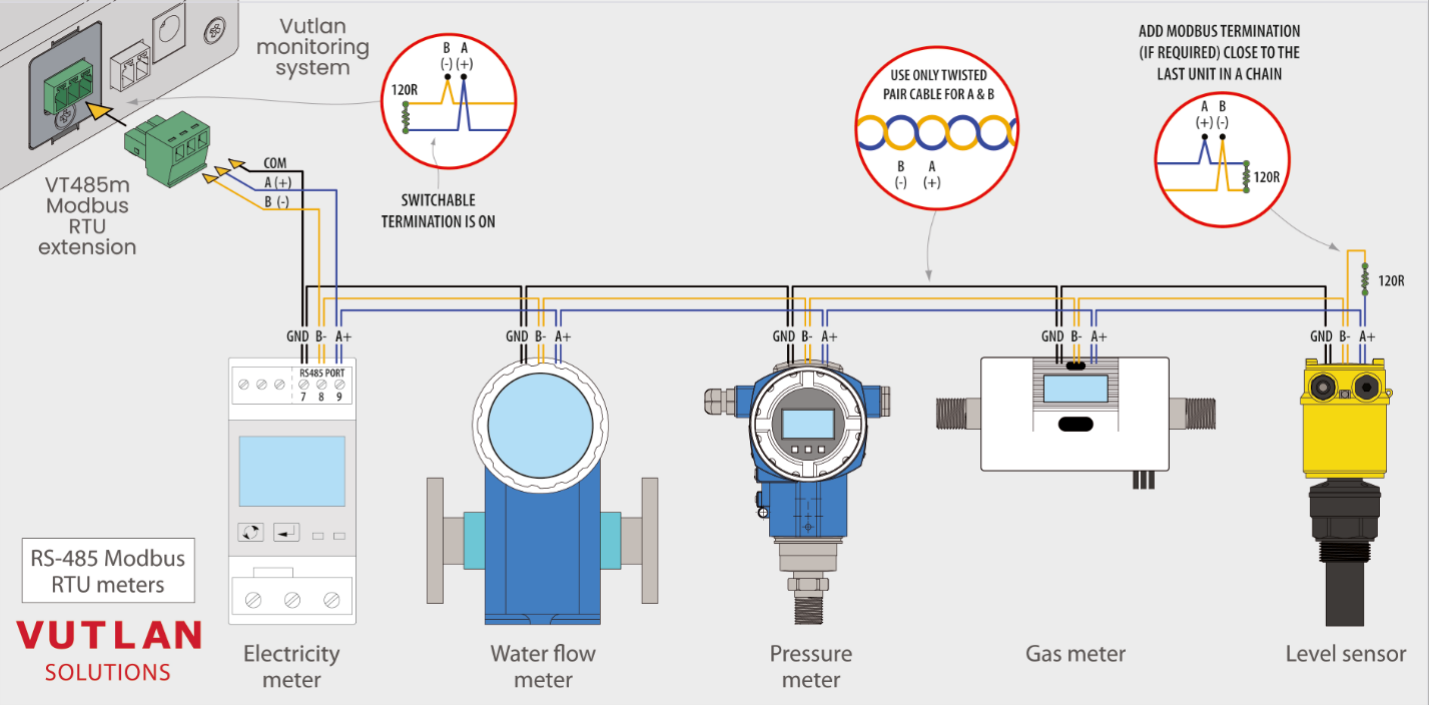

Server Rack & Data Center monitoring

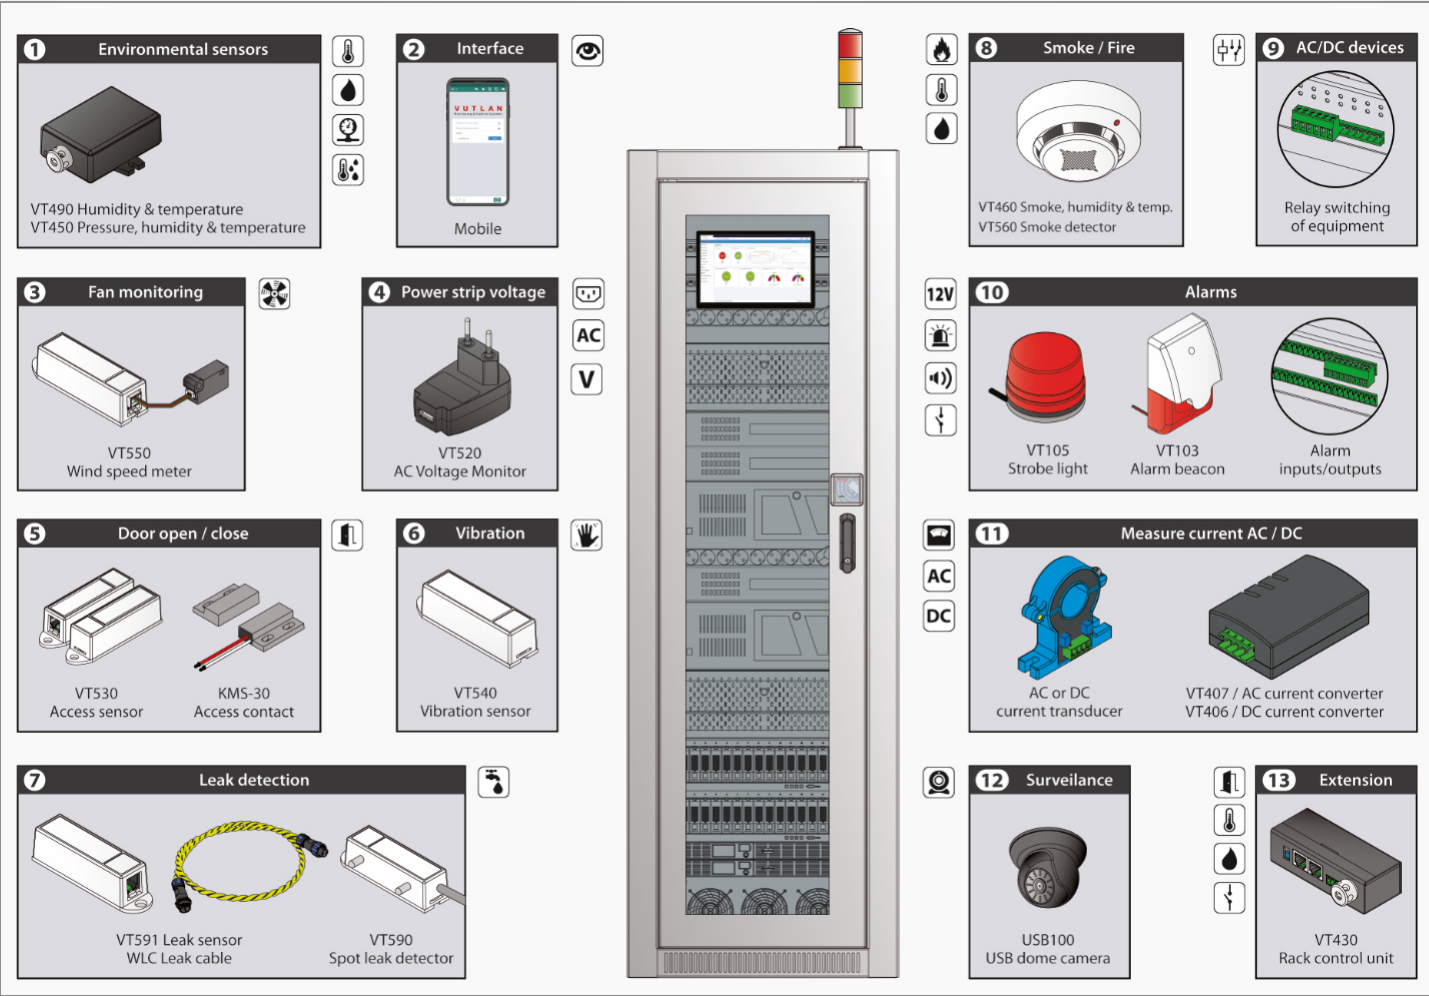

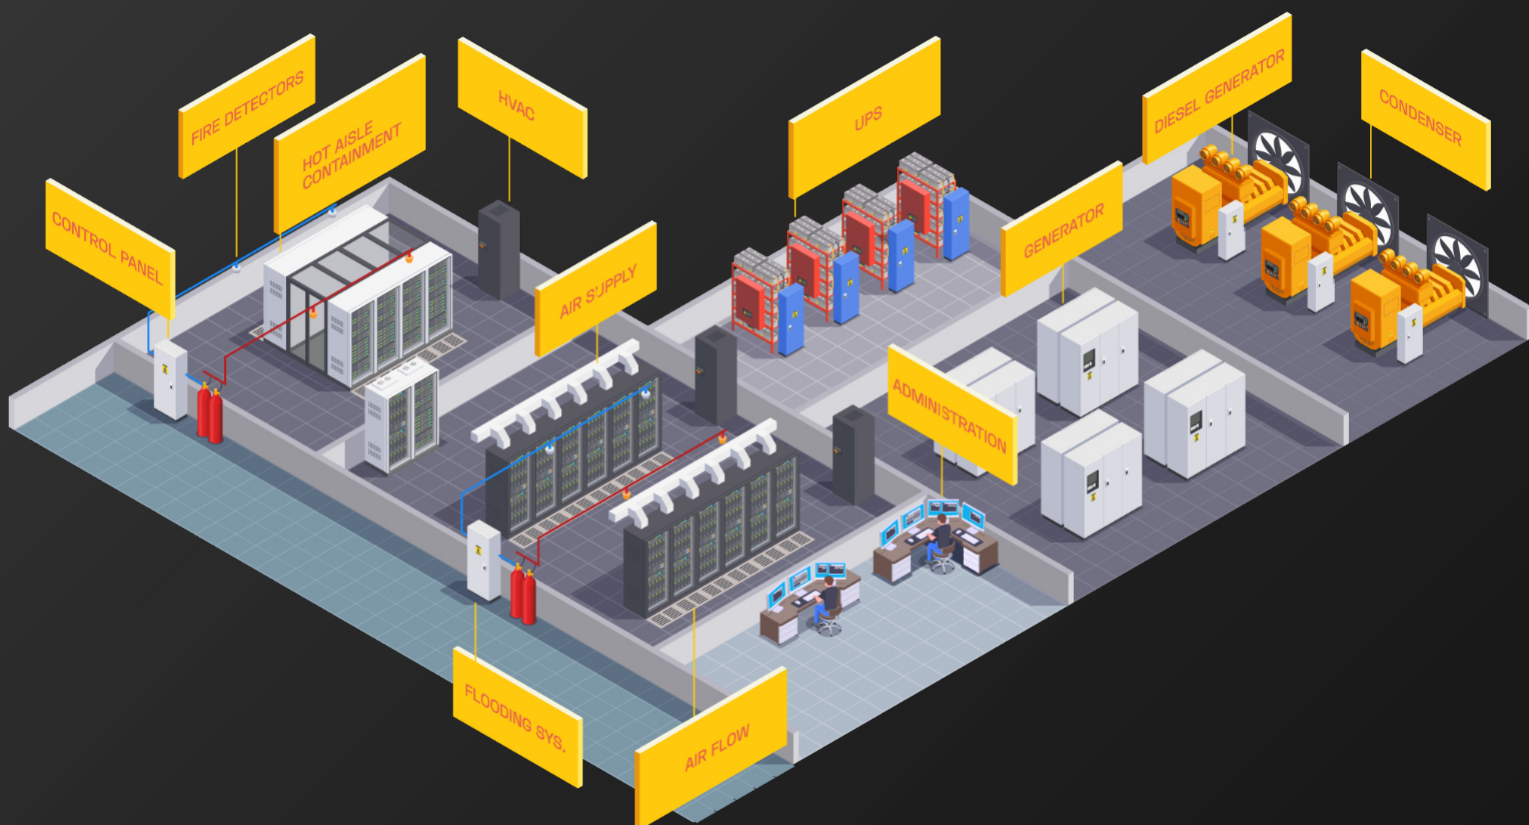


Vutlan

Partner Network

Vutlan is working with Distributors,
Solution Providers and Integrators
all around the world.

65+
PARTNERS

+37
COUNTRIES



Vutlan s.r.o. (LTD)
43 ul.Svornosti,
82106, Bratislava,
Slovak Republic, EU
sales@vutlan.com
www.vutlan.com

VUTLAN